


Econo Thermowells

All dimensions are nominal.
Dimensions in [] are in millimeters.

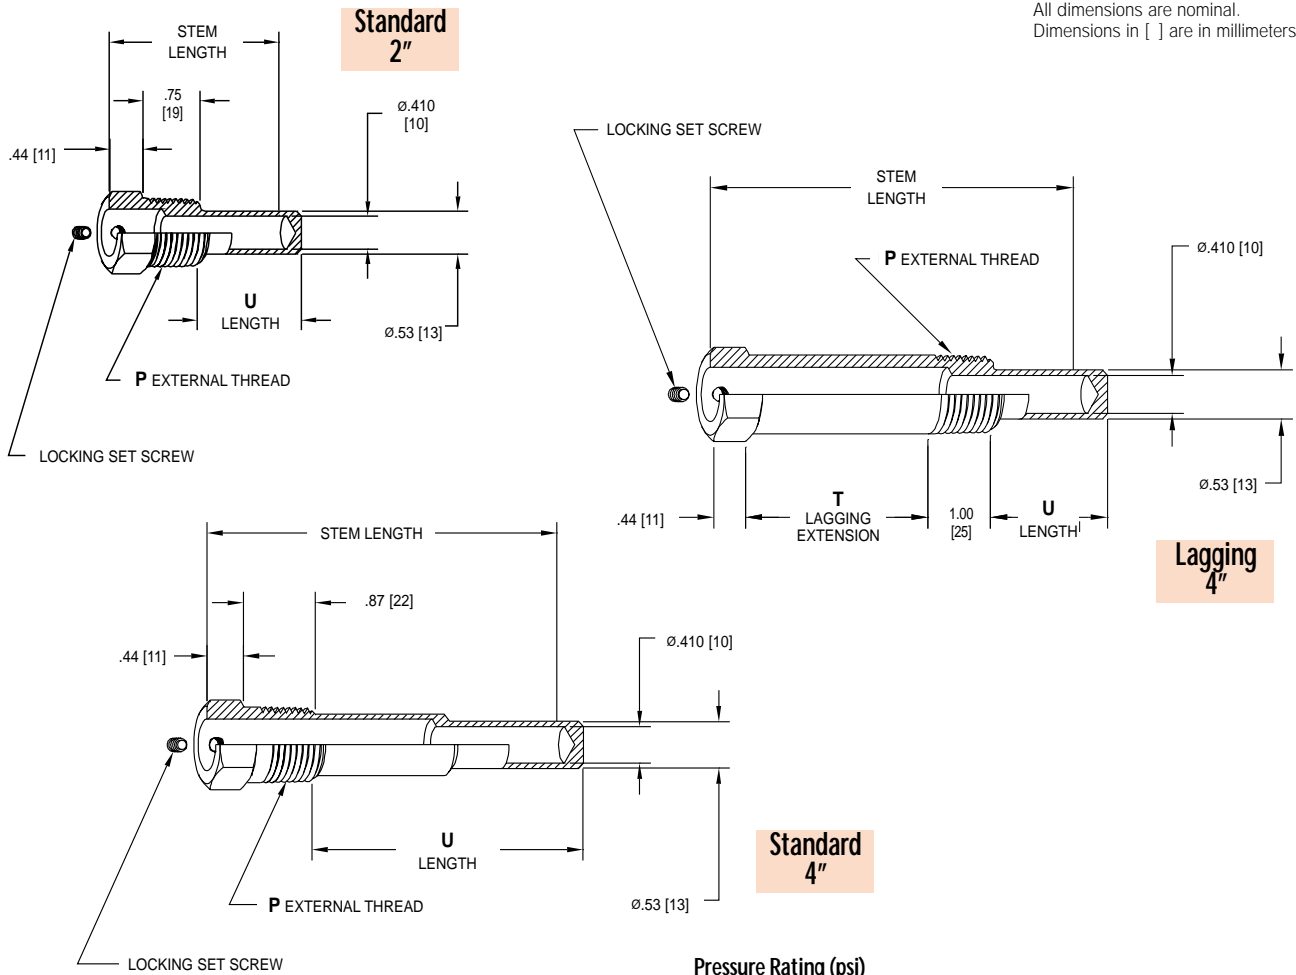

Lengths

Stem Length	Standard Thermowell		Lagging Extension Thermowell	
	U Length		T Lagging	U Length
2"	1.31 [33]		—	—
4"	3.25 [83]		1.81 [46]	1.25 [32]

Pressure Rating (psi)

Material	Operating Temperature					
	70°F	200°F	400°F	600°F	800°F	1000°F
Brass	700	625	125	—	—	—
Carbon Steel	920	890	820	740	500	200
304 Stainless Steel	1230	1190	940	840	660	585
316 Stainless Steel	1230	1230	1120	1030	960	880

Alternative materials and accessories are also available. Please consult the Options and Accessories Section for details.

Selection of the proper thermowell is the sole responsibility of the user. Temperature and pressure limitations must be considered. Improper application may cause failure of the thermowell, resulting in possible personal injury or property damage.

How to Order

Sample Order Number: 3-3C6

Thermowell Style	External Thread (P)	Stem Length	Lagging Extension (T)	Material
3 Econo	3 1/2 NPT 4 3/4 NPT	C 2" Stem G 4" Stem	C 1 3/4 Extension (4" Stem only) Omit if None	2 Brass 3 Steel 5 304SS 6 316SS